


ENERGIZER NO. X92

AAA



Industry Standard Dimensions in mm (inches)

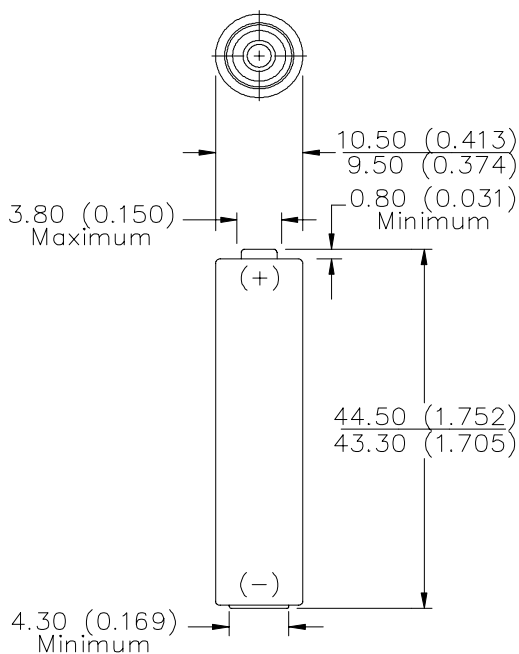

Chemical System: Alkaline
 Zinc-Manganese Dioxide (Zn/MnO₂)
 (No Added Mercury or Cadmium)

Designation: ANSI-24A, IEC-LR03

Battery Voltage: 1.5 Volts

Internal Resistance: 205 Milliohms (Fresh)

Operating Temp: -18°C to 55°C (0°F to 130°F)

Average Capacity: 1,375 mAh (to 0.8 volts)
 (Rated capacity at 25 mA continuous drain)

Average Weight: 11.5 grams (0.4 oz.)


Volume: 3.8 cubic centimeters (0.2 cubic inch)

Cell: One No. X3-312 (size 'AAA')


Jacket: Plastic Label

Shelf Life: 7 years (80% of rated capacity)


TEMPERATURE EFFECTS
 Typical Service to 0.8 Volts

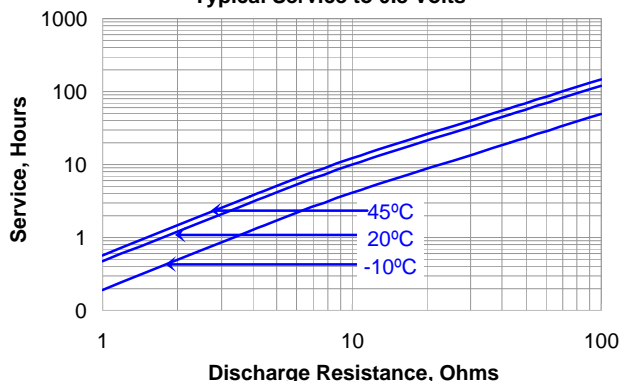

CONSTANT RESISTANCE PERFORMANCE
 Typical Service

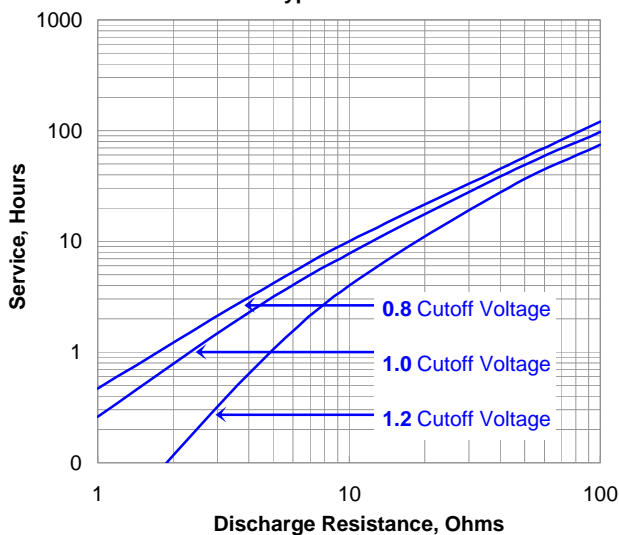

CONSTANT CURRENT DISCHARGE
 Typical Service

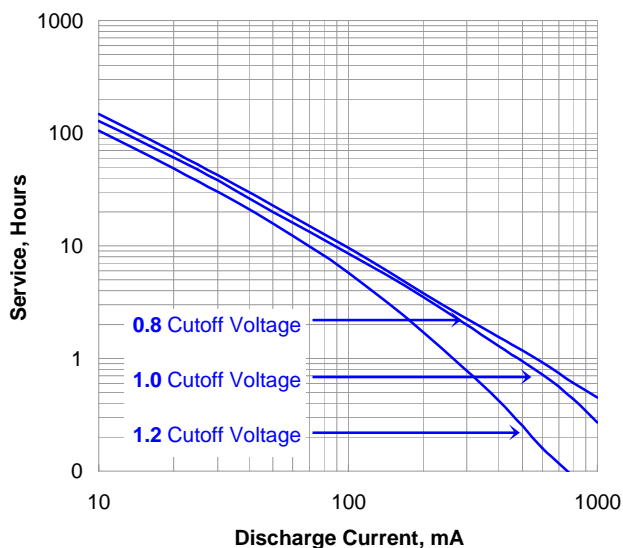

Important Notice


This data sheet contains information specific to batteries manufactured at the time of its publication.

Contents herein do not constitute a warranty.


Copyright © Eveready Battery Co. - All rights reserved

ENERGIZER NO. X92

CONSTANT POWER DISCHARGE
Typical Service

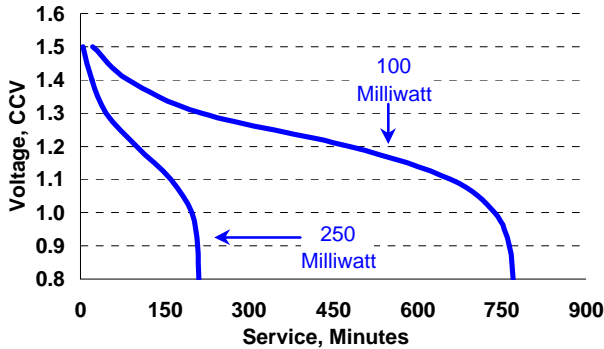


CONSTANT POWER DISCHARGE
Typical Service

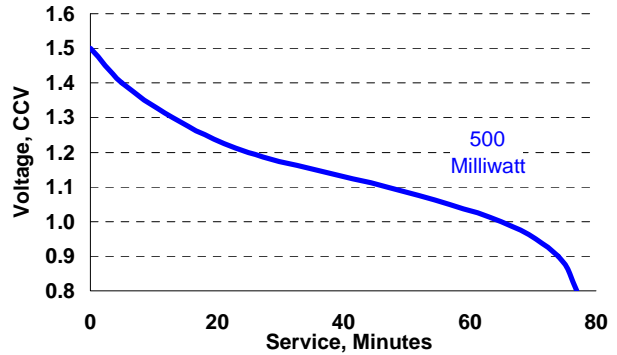

Industry Standard Tests @ 20° C


LIGHTING

5.1 ohm - 4 min/hr 8 hr/day

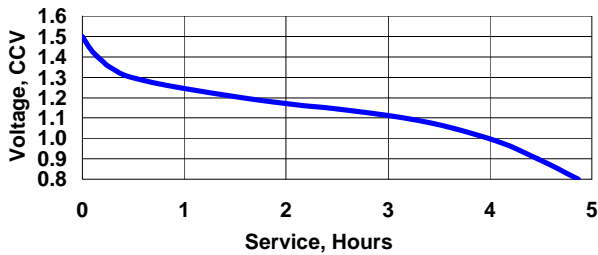


PHOTOFLASH

600 mA - 10 sec/min 1 hr/day

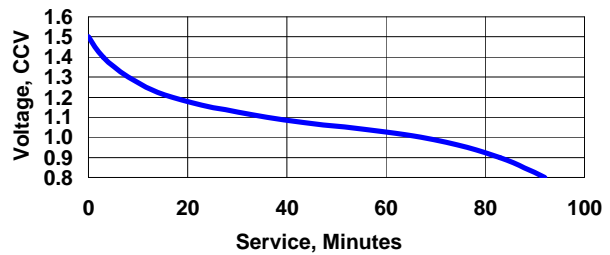


REMOTE

24 ohm - 15 spm - 8 hr/day

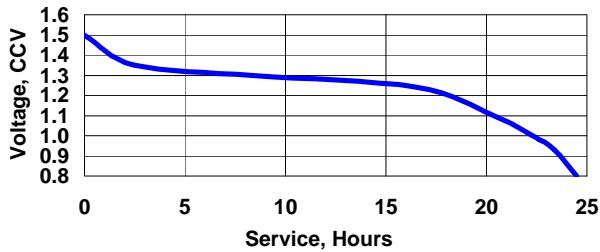

TAPE - ELECTRONIC GAMES-DIGITAL AUDIO

100 mA - 1 hr/day

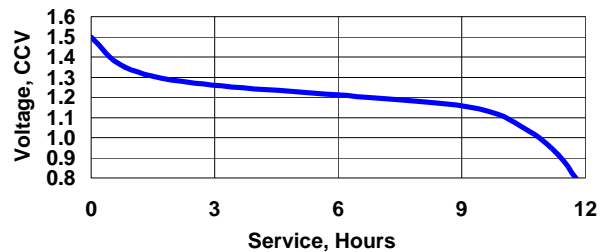

Important Notice

This data sheet contains information specific to batteries manufactured at the time of its publication.

Contents herein do not constitute a warranty.

Copyright © Eveready Battery Co. - All rights reserved